

VXR-9000 Series

VHF/UHF Rack Mount Repeater/Base Station

SPECIFICATION SHEET

High Power Output for Exceptional Reach and Performance

Available in 50 Watt options, the VXR-9000 delivers the reliable performance and extended range needed. The slim-line design is crafted for easy installation and integration into most repeater sites.

Large Channel Capacity with Priority Scan

The VXR-9000 may be programmed with up to 32 channels over a wide frequency range and can perform in repeater or base station mode, depending on the application. Includes Priority Channel scanning capability for efficient communications monitoring.

Power Supply Backup with Alert

Should DC power fail at the repeater site, the VXR-9000 will automatically revert to a backup DC power source, if connected. Under backup DC power, the repeater will transmit an alert message to notify the operator that immediate attention is required at the repeater site.

Flexible, Automatic Command Sequence Configuration

The VXR-9000 may be programmed to perform a five-step sequence of commands for certain operating events. For example, during a DC power failure and the repeater switches to a backup power supply, the repeater can be programmed to switch to low power and send a CW ID advising of the situation, etc.

Designed for High Reliability

The cooling fan diameter is 8cm and thermostatically controlled to ensure a stable temperature environment for the VXR-9000. Fan operation may be programmed for three options: off, continuous or temperature-controlled, depending on the application. A malfunction alarm is also included.


Simplex / Duplex Capacity

The VXR-9000 is designed for simplex mode with single-antenna operation for full-duplex mode with the optional duplexer when optimal communications is necessary at all times.



VXR-9000

483mm (W) X 89mm (H) X 343mm (D)

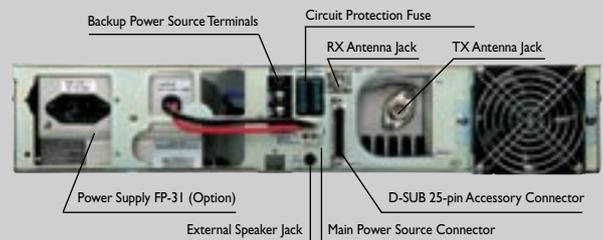

REAR PANEL



The Vertex Standard Difference

Our number one goal is achieving superior customer satisfaction by delivering products and services that exceed your expectations. Vertex Standard radios are built to last and are backed by an industry-leading 3 year warranty – another great reason to choose Vertex Standard. Ask your Dealer for more details.



Meets the following standards:
AS/NZS4295, ISO9001 and
ISO4001.

Additional Features

- 6 Dual-function programmable keys
- 47 CTCSS tones / 108 DCS codes encode & decode
- Multi-tone decode
- CW ID Transmitter
- CW Message
- Compander per channel
- D-sub 25 pin accessory connector
- Automatic DC backup switching w/alert
- EIA rack mount size (19" rack)

Accessories

- MH-67A8J: Standard microphone
- MD-12A8J: Desktop microphone
- FP-31: Internal power supply unit
- FIF-9: 4-Wire line interface

Option Boards

- FVP-25: Voice inversion encryption
- FVP-35: Rolling code encryption

VXR-9000 Series Specifications

	VHF	UHF
General Specification		
Frequency Range	134 – 160MHz (A) 146 – 174MHz (C)	400 – 430MHz (A) 450 – 490MHz (D)
Number of Channels	32	
Power Supply Voltage	13.6V DC ± 10%	
Channel Spacing	12.5 / 20 / 25kHz	
Operating Temperature Range	-30°C to +60°C	
Frequency Stability	1.5ppm, 1.0ppm (30 min. after wake up)	
RF Input-Output Impedance	50 Ohms	
Dimension (W X H X D)	483mm x 89mm x 343mm	
Weight (Approx.)	9.7kg (50W model)	
Receiver Specification: measured by TIA/EIA-603		
Sensitivity 12dB SINAD	0.25µV	0.3µV
Adjacent Channel Selectivity	85dB / 79dB	84dB / 77dB
Intermodulation	83dB / 81dB	82dB / 80dB
Spurious and Image Rejection	90dB	
Audio Output	4W @ 4 Ohms	
Transmitter Specification: measured by TIA/EIA-603		
Output Power	50 / 25 / 10W (100W optional)	
Duty Cycle	50%	
Modulation	16K0F3E, 11K0F3E	
Maximum Deviation	±5.0kHz / ±2.5kHz	
Audio Distortion	< 2.5% @ 1kHz	
Conducted Spurious Emission	80dB below carrier	

Specifications are subject to change without notice or obligation.

VERTEX STANDARD is registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. © Vertex Standard Co. Ltd. 2010
BTB/MA534_VXR-9000_05/2010

**Have a question about Vertex Standard radios?
Contact your authorised Vertex Standard dealer today!**